

GIS-Based Assessment of Best Route in Complex Traffic Environment: A Case of Kolkata Municipal Corporation

Sajal Ghosh, Bulti Das and Eshita Boral*

Department of Geography and Disaster Management, Tripura University

Received: 2023-06-09

Revised: 2024-03-26

Accepted: 2024-05-31

Published: 2024-07-31

Key Words: Structural analysis; Transportation networks; Congestion; Travel time; Best route

Correspondent email :
e.boral@gmail.com

Abstract. In an emergency like an urban fire, road accident, or critical condition of patients, the shortest possible route to reach the destination is one of the most sought-after issues in transportation studies. However, the physical distance of the shortest route becomes longer distance than the travel time distance due to traffic congestion in metropolitan cities like that of Kolkata. So, the selection of an alternative route is essential to organize the journey logically. A well-structured road network provides multiple options to road users for selection of the best route from the shortest and alternative route according to their demand. So, the present study aims to identify the structural characteristics of road networks by graph theory and the selection of the best route using the GIS technique. It has been found that the road network of Kolkata is characterized by complex structure and grid configuration of the network. Selection of the best route also ranges from the shortest route to alternative route due to spatial variation of traffic speed on different roads in peak hours. The current study identifies the optimal route in terms of travel time to reach the required destinations during peak hour duration in the city of Kolkata.

©2024 by the authors. Licensee Indonesian Journal of Geography, Indonesia.

This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY NC) license <https://creativecommons.org/licenses/by-nc/4.0/>.

1. Introduction

Kolkata has been facing various problems related to the traffic environment like extreme traffic congestion (Chakrabarty & Gupta, 2015; Chowdhury, 2015), road accidents (Ray & Bhaduri, 2018; Mukherjee & Mitra, 2020) and urban fire (Ghosh & Mondal, 2019; Purkait & Halder, 2016). There are many factors like road traffic, narrow streets, accidents, infrastructure conditions, one-way roads, crosswalks, stops, etc. which influence urban circulation (Ivan et al., 2015). Road design and capacity have a very important role in controlling these types of urban hazards because the road network connects the road accident spots and fire spots with facilities like hospitals, fire stations, police stations, etc. Identification of shortest routes, alternative routes, and best routes with their widths between fire-prone areas and fire stations in peak hour situations is very important for quick rescue operations because here time is the crucial factor in controlling the effect of fire (Ghosh & Mondal, 2019). So, the time gap between a fire event and a fire rescue operation is dependent on the speed of the fire vehicle or engine. Further, an ambulance should reach the hospital at the right time to save the patient's life, especially in accident events (Shivaprasad et al., 2018). One hour after the accident is the golden hour for the treatment of accident victims, so, an injured person should be moved to the hospital very fast. Moreover, travel time is also very important for daily travel, particularly to the workplace. Number of studies have determined the level of service of roads (Biswas et al., 2016; Das & Ahmed, 2018) in Kolkata and suggested various measures to control traffic congestion and reduce travel time by improving the efficiency of road networks (Arti et al., 2022; Chu & Thi, 2017; Touluni et al., 2023).

Therefore, an efficient road network is essential for emergency vehicles as well as public and private cars. Structural analysis of transport networks is essential to measure the efficiency of road networks (Cole & King, 1968) and is also required to represent certain spatial issues of the socio-economic system (FitzGerald, 1974). Graph theory (Sadavare & Kulkarni, 2012) and GIS tools (Rai et al., 2013) are important approaches to road network analysis. In this paper connectivity and accessibility have been measured as a part of the structural analysis of the network through graph theory and the GIS tool has been used to evaluate the efficiency of the road network in the perspective of traffic congestion in Kolkata. Route choice behavior among travelers from the logical point of view has been assessed using the best route tool in GIS software. The main objective of the present study is to create an elaborate and more complex methodology to identify the optimal routes for emergency situations and identify the best route based on time during peak hours in Kolkata Municipal Corporation.

2. Study Area

The study area is the Kolkata Municipal Corporation area (22°30' N to 22°37' N latitude and 88° 23' E to 88°18' E longitude) which has a total road length of 4,636 km (Ray, 2018). A total 17, 46,838 registered motor vehicles (Kolkata Traffic Police, 2018) and 187 – 322 lakhs daily transit passengers (KMDA, 2008) have used the road infrastructure of the city. Major travel directions and demands have been organized based on several urban facilities like health, administration, opportunities of transport modes, business etc. Total fourteen major traffic points viz. Garia, Science City More, Sinthir More, Shyambazar five points crossing, Park Circus seven

points crossing, KC Das More, Exide More, Prince Anwar Shah road crossing, Khidirpore crossing, Thakurpukur, Gariahat, Mallick Bazar crossing, Ruby Hospital More, Kalighat metro station have been selected for the study based on the center of urban facilities.

3. Methods and Methodology

The evaluation of traffic performance is important to treat congestion and as well as to select the best route. Traffic speed, travel time index and delay rate of selected roads have been measured to identify the performance of traffic (Roess *et al.*, 2011). Travel time is the time it takes to travel from the place

of origin to the destination (Hartanto Susilo & Imanuel, 2018; Karuppanagounder & Muneera, 2017; Lomax, 1990; Lomax & Schrank, 2005; Rao, & Rao, 2012). Travel time for every road has been measured through Google traffic maps in peak and off-peak hours. Google Maps can provide travel time along the road from origin to destination in both peak and off-peak hours (Sahu *et al.*, 2021). Travel time of each selected stretch has been collected for three modes bike, car and bus because these categories of vehicles occupy the major proportions of traffic composition in Kolkata (KMDA, 2008). The average traffic speed of selected stretches has been calculated based on collected travel time data. Traffic delay is the time difference

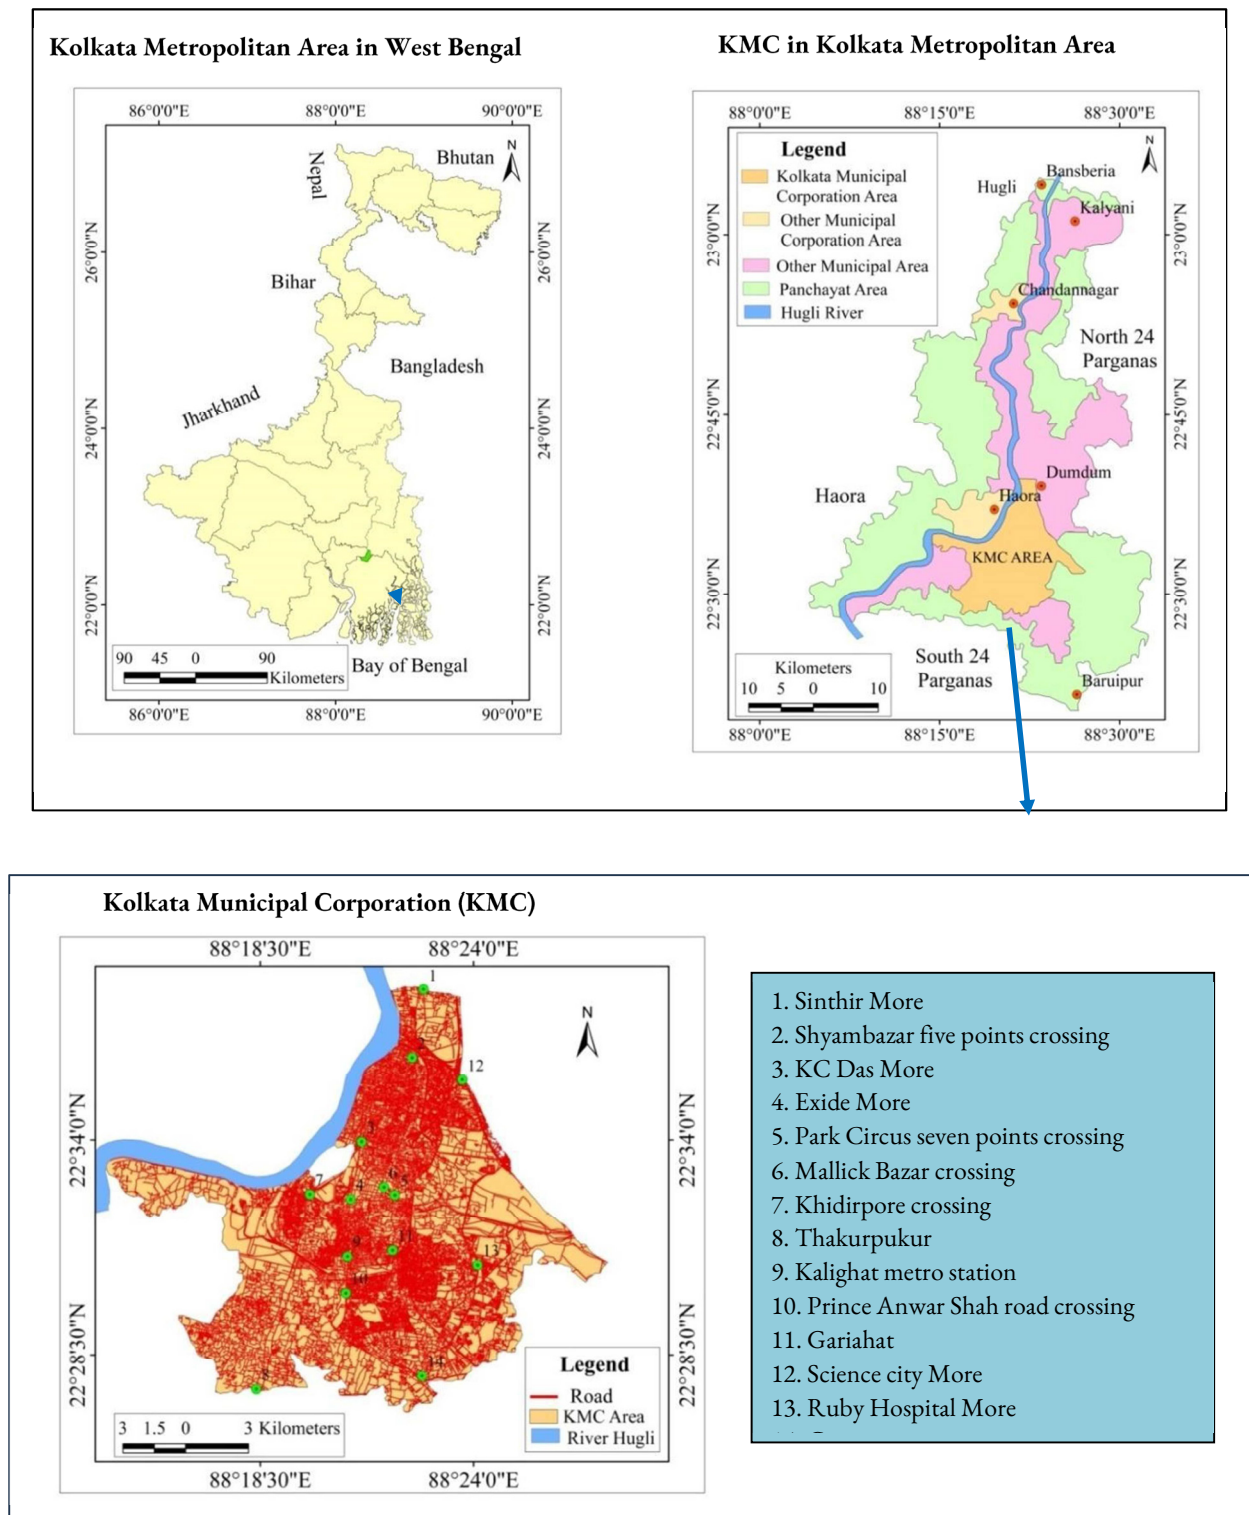


Fig.1 Location map of the study area Source: NATMO, KMC

between the actual travel time and acceptable Travel Time (Babu, 2017; Dey, 2016; Lomax et al., 1997). For estimating the traffic delay field survey was conducted at intersections along the shortest and alternative routes. Road network data of Kolkata were downloaded from OSM (Open Street Map) data using the QGIS online service application. The data contains an attribute to store the length, direction and time required to travel over each road. Road capacity, traffic volume, and traffic speed vary on different categories of urban roads. But in real situations, traffic volume is not matched with road capacity, consequently, traffic speed is being reduced in Kolkata. So, the selection of the best route is essential to reach the destination faster than other routes. Best route selection not only depends on distance but also on travel time and delay. Therefore, the calculation of the travel time index and delay rate is required for the selection of the best route. A Topology denotes the relationships between spatial objects (Bhatta, 2011). The arrangement and connectivity of a network are known as its topology (Kisgyorgy & Vasvari, 2014; Saxena, 2005; Chen et al., 2021). A topology of the road network has been built using topology rules through ARC GIS 10.3 to get good analysis and results. Then, the Network analyst extension was used in ArcGIS to create the network dataset. The road network data set can perform the route analysis efficiently (Ahmed et al., 2017). A transport network is a set of nodes and edges (Saxena, 2005). The spatial pattern of the network is important to understand the structural attributes (Taaffe et al., 1973). A well-connected network has many short links, numerous intersections, and minimal dead-ends providing continuous, direct routes to destinations. Various indices used for evaluating the connectivity pattern of road transport networks are Alpha Index, Beta Index, Gamma Index, Eta Index (Kansky, 1963) and Network Density. The ratio of the number of circuits present in a network to the maximum number of possible circuits in the same network is called the alpha index. It measures how well circuits has developed in a network (Arif & Gupta, 2020; Nagne et al., 2013; Patra et al., 2019; Rodrigue & Jean-Paul, 2006). The Beta index is expressed by the relationship between the number of edges over the number of nodes that exist in the transportation network and is indicative how complex is the existing network (Al-Dami, 2015; Dutta & Mistri, 2012; Dasmahapatra, 2023; Rahman & Kumar, 2023). The Gamma index is the measure of the percentage of the area connected using the ratio between the actual number of edges to the maximum number of edges of the network (Kundu & Basu, 2015; Nagne & Gawali, 2013; Robinson & Bamford, 1978; Sarkar & Ray, 2021). Network density (ND) is the length of the links per unit area. The higher value of ND indicates a more developed network. In other words, the higher network density value indicates a denser road network and also refers to a better transport system (Daniel et al., 2020; Li et al., 2019; Nagne & Gawali, 2013). Connectivity and accessibility have been measured in this section using graph theory and GIS. The spatial pattern of the transport network of Kolkata has been identified based on alpha and gamma index values. The major three network patterns are spinal, grid and delta pattern (Bora & Baruah, 2019). The spinal and delta pattern refers to the minimal and maximal connectivity respectively. The Grid pattern is characterized by an intermediate situation between the spinal and delta patterns (Daniel, 2021; Haque & Alam, 2020; Patra, 2015). GIS-based Network Analyst is a powerful extension that provides network-based spatial analysis including routing, travel directions, closest facility, and service

area analysis (Kumar & Kumar, 2016). The existing network is characterized by peak hour congestion (Chowdhury, 2015) and consequently shortest route, alternative route, and best route identification are required to avoid traffic congestion. The shortest route is a route between two vertices *or* nodes (origin and destination) with minimum distance, time, or cost depending on which factor is being minimized. Here, the shortest route has been determined based on minimum distance. An alternative route is another route between the same origin and destination. An alternative route has been determined for providing the travel option to road users (Ghosh & Mondal, 2019). The best route has been identified from the shortest and alternative routes to avoid the travel delay and minimize total travel time.

4. Result and Discussion

4.1. Road Network Analysis of Kolkata

Road transport is the most important transportation mode for intra and intercity journeys. So, mobility in Kolkata depends largely on a smooth and efficient road transport system. Analyzing the existing road network is fundamental for conducting the best route analysis because it provides the context and constraints within which route options must be evaluated. Without considering the situation of the road network, it would be challenging to identify optimal routes that balance factors such as travel time, distance, traffic conditions etc. Normally accessibility increases with the increase in connectivity (Rahman & Kumar, 2023). A network with high connectivity can provide more alternative routes between origin and destination. However, traffic delay increases with the increase in connectivity (Kumar et al., 2017). Traffic congestion is one of the major problems of Kolkata. So, in this situation selection of the best route is more important than the shortest route and alternative routes. Analysis of the best route is not possible without stating the situation of the existing network.

Various road network indexes have been calculated based on the existing road network in the whole KMC area (Fig. 2 & 3). The Eta index has been calculated to examine the utility of the road network in the KMC area. The value of the Eta index indicates that the average length of an edge of the road network is 0.069 km. The beta index determines the complexity of the network and indicates the number of edges per node in a transport network (Levinson, 2012; Sarkar, 2013). Beta value 1.38 indicates that the network has a complex structure. The alpha index uses the concept of a circuit – a finite, closed path starting and ending at a single node (Dill, 2004). The Alpha Index reflects the proportion of circuits that have developed within the given network. The value 0.194 indicates that not many circuits have developed amongst the selected road network within the city. The alpha index value shows that the transport network of Kolkata is a Grid configuration (Patra, 2015). The grid pattern is the transitional stage of network growth between minimal and maximal connectivity. Here, the Gamma Index value is 0.46 which means that the area is 46 percent connected in terms of the selected roads indicating moderate connectivity. The road network density value is 17.17 km/ sq.km and the average distance between intersections is 96 metre (Table 1). This theoretical road network connectivity has been evaluated regarding present problems of Kolkata like road accidents as it is directly and indirectly correlated with traffic congestion.

The major three network patterns spinal, grid and delta patterns can be identified based on the Gamma and Alpha indices in the city. 0.3 to 0.5 gamma index value and alpha value 0 indicates the Spinal Pattern network which means minimal connectivity. The gamma index value of 0.66 to 1 and alpha index value of 0.5 to 1 indicates the Delta Pattern network which means maximal connectivity. Gamma index value of 0.5 to 0.66 and an alpha index value less than 0.5 indicates the Grid Pattern network which means the transitional stage of network growth between Spinal and Delta Patterns (Patra, 2015). The spinal and delta pattern network indicates the

minimal and maximal connectivity respectively, while the Grid pattern indicates an intermediary condition. The wards characterized by high connectivity are found in the central part of Kolkata while low levels of connectivity are found in wards located at marginal parts of the city (Haque and Alam 2020). So, uneven spatial development of road infrastructures is found in the KMC area.

4.2. Best Route Analysis in Peak Hour Situation

It has been found that most of the arterial roads in the KMC area face the problem of traffic congestion during peak

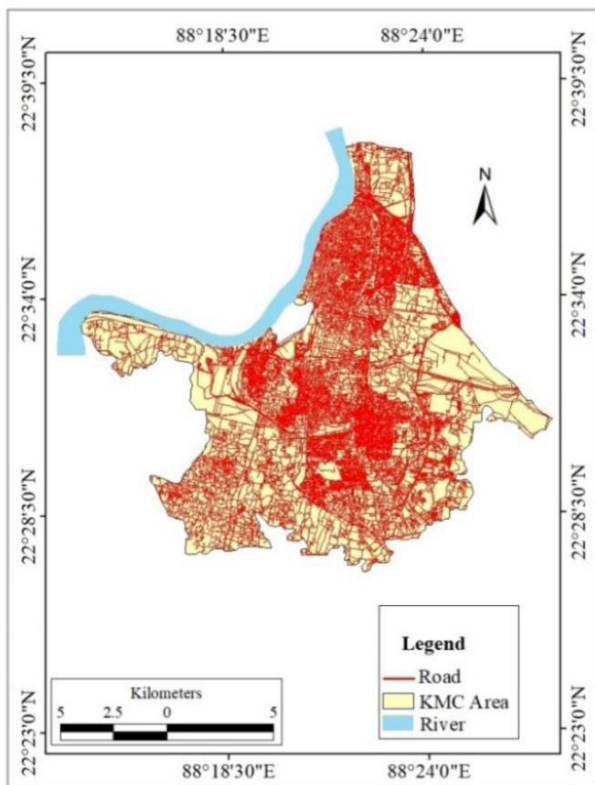


Fig. 2 Road Map of KMC Area
Source: OSM Data

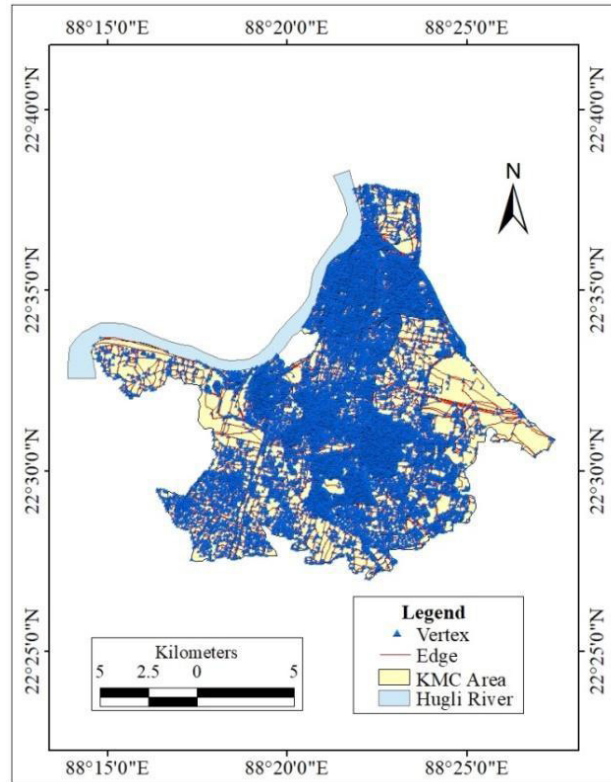


Fig. 3 Road Network Dataset of KMC Area
Source: Prepared by Authors based on OSM Data

Table: 1 Measure of Connectivity Index of Road Network in KMC Area

SL No	Index	Formula	Explanation	Value
1	Eta	$\eta = \frac{M}{E} = \frac{M}{E}$	M= Total network distance E= Number of edges	0.069 km
2	Beta	$\beta = \frac{\sum e}{\sum v}$	e= edges v= vertices	1.389
3	Gamma	$\gamma = \frac{e}{3(v-2)}$	e= edges v= vertices	0.463
4	Alpha	$\alpha = \frac{e-v+1}{2v-5}$	e= edges v= vertices	0.194
5	Network density	Network Density = $\frac{M}{A} = \frac{M}{A}$	M= Total network distance A= Total area	17.177 km/ sq. km
8	Average Distance between Intersection	Average Distance between Intersection = $\frac{L}{N} = \frac{L}{N}$	L= Total network distance N=Number of vertices	0.096 km

Source: Calculated based on Road Network Data set (Obafemi et al., 2011; Nagne & Gawali, 2013; Sreelekha et al., 2016)

hours. Heavy traffic congestion occurs at the traffic intersection points, particularly because of the waiting period at these junctions generated by the traffic signaling system. That is why traffic congestion or very slow movement of traffic is inherent with the increase of traffic intersection points on a particular road. However, traffic speed also depends on other factors like the number of traffic lanes and the width of the carriageway. Total fourteen major traffic points located across the KMC area have been selected for route analysis. These points have been selected based on their locational variability and also being characterized by several urban facilities like health, administration, diversification of transport mode, business, etc. The shortest routes among these points have been identified to save travel time and cost in emergencies and also in day-to-day trips. The shortest route analysis has been performed through GIS based on the route distance. But traffic congestion is one of the major problems in Kolkata. Congestion has a negative impact on the economy and environment. Congestion reduces the traffic speed which enhances the travel time even in the shortest route than the other routes. Alternative routes are also identified to avoid traffic congestion on the shortest routes. So, logically best route analysis became necessary to get a comparatively smooth journey. The best route has been chosen from the shortest and alternative routes based on travel time. Travel time might be reduced between two points using congestion-free routes even having longer distances than the shortest route due to the high speed of the vehicle. So, best route analysis is required in metropolitan cities like Kolkata to ensure fast movement in the city. Many studies focused on travel distance, travel time and congestion for the selection of the optimum or best route (Dalip & Kumar, 2016; Tamin, 1996). In Kolkata, travel time between origin and destination has been increased from off-peak hour to peak hour. Travel time is not only dependent on distance but also on traffic speed which is controlled by the congestion level of each road. So, minimum travel time is more significant than the physical distance in a congestion situation to reach the destination from the origin. Traffic delay rate (DR) and travel time index (TTI) efficiently evaluate the travel time and congestion (Dey, 2016). The difference between the travel time required to cross a specific distance during peak and off-peak periods is called Delay Rate which was developed by Lomax et al., (1997) based on travel rate. The travel time index determines how greater the peak period travel time is than the free flow travel time on a fixed road segment (Lomax et al., 1997). The best route between nodes has been identified based on traffic delay rate (DR) and travel time index (TTI) value. A higher Delay Rate value indicates more congestion levels within the road segment and a higher Travel Time Index value signifies the higher severity of congestion on a road stretch (Table 3). It has been found that the delay rate of the journey increased with the increase in the number of intersections per kilometer length (Table 2). So, the number of intersections also influenced the selection of the best route. The shortest route between Garia and the VIP Bridge is EM Bypass. The traffic speed is comparatively higher along the EM Bypass than the alternative road that runs through the heart of the KMC area. SCM road and Park Circus connector road are the directions of alternative routes. The DR and TTI values are lesser in the shortest route than the alternative route because the road width is high and the number of road intersections is low in the EM Bypass. So, the best route is EM Bypass. The alternative road between these

two intersections takes 42 minutes extra time (Fig. 11). The shortest route from Sinthi to Shyambazar five-point crossing is the BT Road. The average traffic speed of BT Road is 15.88 km/ hour. RG Kar, Manmathon Dutta road, Raja Manindra road and BT road are the direction of alternative roads. Here, the shortest route is the best route because DR and TTI values are higher in the alternative route than the shortest route (Fig. 4). APC road is the shortest route between Shyambazar five points and Park Circus seven points crossing. Bidhan Sarani, Lenin Sarani, APC road, Parikshit Roy road, Convent road and CIT road are the directions of alternative roads. The traffic speed of the alternative route of APC road is comparatively high at no major crossing lies in this route. Moreover, APC road faces heavy traffic congestion at Moulali crossing and the waiting period at the traffic signal is also over 1 minute in each direction. So, an alternative route is the best route to reach the destination from the origin (Fig. 5). CR Avenue is the shortest route from Shyambazar five points crossing to KC Das More. Bidhan Sarani and Lenin Sarani are the directions of alternative routes. Here, an alternative route is the best route because the DR and TTI values are lesser in the alternative route than the CR Avenue (Fig. 6). Jawahar Lal Nehru road is the shortest route between KC Das More and Exide More. The traffic speed of the alternative road is higher than JL Nehru road but the alternative route takes an extra 7 minutes due to its greater length, thus Jawaharlal Nehru road is the best road between KC Das More and Exide More (Fig.7). The shortest route from Exide More to Prince Anwar Shah road crossing is SP Mukherjee road. AJC Bose road, Sarat Bose road and Southern Avenue are the directions of alternative routes. The traffic speed of the alternative route is high but takes extra time due to the greater length of the alternative route. SP Mukherjee road statistically derives to be the best route from Exide More to Prince Anwar Shah road crossing though during peak hours preference for an alternative route which has fewer crossings is seen (Fig. 8). Diamond Harbour road is the shortest route between Khidirpore crossing and Thakurpukur. Jemslong Sarani is the alternative route of DH road. The traffic speed on alternative roads is high and the length is approximately the same. That is why an alternative route saves 1 minute of travel time. Here, Jemslong Sarani shows better movement between Khidirpore Crossing and Thakurpukur (Fig. 9). Subodh Chandra Mallick road is the shortest route between Park Circus seven-point crossing and Garia four-point junction. The alternative road of SCM road is the EM Bypass and EM Bypass connector road. The alternative road saves 2 minutes of travel time due to high speed. Here alternative route is the best route between Park Circus seven points crossing and Garia four points junction (Fig.10). AJC Bose road is the shortest route between Mallick Bazar crossing and Khidirpore crossing. Although the traffic speed of alternative road is high but it takes an extra 2 minutes of travel time since it is lengthier. But as DR and TTI values are higher in AJC Bose road the lengthier alternative route is the best route (Fig. 12). RB Avenue is the shortest route between Ruby Hospital More and Kalighat metro station. Most of the length of RB Avenue is under slow traffic movement. The alternative road of RB Avenue has low traffic speed and route length is high. So, the alternative route runs 8 minutes extra travel time. So, though slow traffic movement is experienced along RB Avenue it is the best route between Ruby Hospital More and Kalighat metro station (Fig. 13).

Table 2: Impact of Intersections on Delay Rate

Corridors Name	length in km	Total No. of Intersection	No. of Intersection/ km	Delay (Second)
APC-BT	10.23	58	6	904
NSC-SP	13.36	72	5	700
DH-Khidirpur	15.07	52	3	660
CR-BT	8.82	66	7	1122
SC-Gariahat	13.88	73	5	600
EM Bypass	15.65	46	3	420
AJC - EM Bypass	10.45	34	3	380
RB Ave- EM Bypass	12.44	48	4	620

Source: Calculated by the authors based on Google Live traffic; (Maparu & Pandit, 2010), Primary Survey

Table 3: Determination of Best Route

Origin and Destination	Shortest Route		Alternative Route		Best Route																		
	Delay Rate (in Second)	Travel Time Index	Delay Rate (in Second)	Travel Time Index																			
Sinhi More to Five Points Crossing	180	1.21	420	1.47	Shortest																		
Five Points to Seven Points Crossing	724	1.57	540	1.36	Alternative																		
Five points to KC Das More	522	1.67	420	1.39	Alternative																		
KC Das to Exide More	420	2.17	600	1.90	Shortest																		
Exide More to Prince Anwar Shah Road Crossing	300	1.36	420	1.44	Shortest																		
Khidirpore Crossing to Thakurpukur	540	1.35	240	1.13	Alternative																		
Seven Point to Garia Four Points Junction	600	1.42	360	1.23	Alternative </tr <tr> <td>Garia to VIP Bridge</td> <td>420</td> <td>1.23</td> <td>2280</td> <td>1.90</td> <td>Shortest</td> </tr> <tr> <td>Mallick Bazar Crossing to Khidirpore Crossing</td> <td>240</td> <td>1.36</td> <td>180</td> <td>1.21</td> <td>Alternative</td> </tr> <tr> <td>Ruby Hospital More to Kalighat Metro Station</td> <td>480</td> <td>1.53</td> <td>780</td> <td>1.72</td> <td>Shortest</td> </tr>	Garia to VIP Bridge	420	1.23	2280	1.90	Shortest	Mallick Bazar Crossing to Khidirpore Crossing	240	1.36	180	1.21	Alternative	Ruby Hospital More to Kalighat Metro Station	480	1.53	780	1.72	Shortest
Garia to VIP Bridge	420	1.23	2280	1.90	Shortest																		
Mallick Bazar Crossing to Khidirpore Crossing	240	1.36	180	1.21	Alternative																		
Ruby Hospital More to Kalighat Metro Station	480	1.53	780	1.72	Shortest																		

Source: Calculated by the authors based on Google Live traffic map; (Maparu and Pandit, 2010), Primary Survey

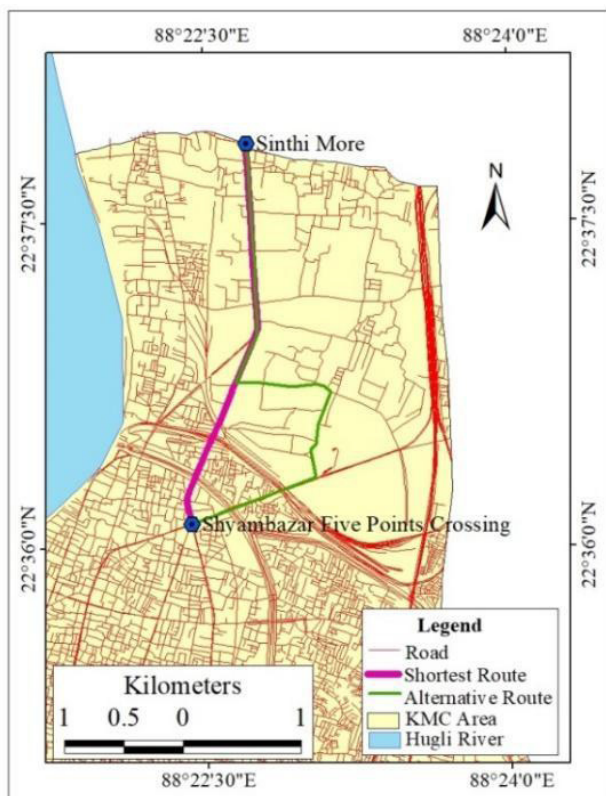


Fig. 4 Shortest and Alternative Routes between Sinhi More and Five Points Crossing

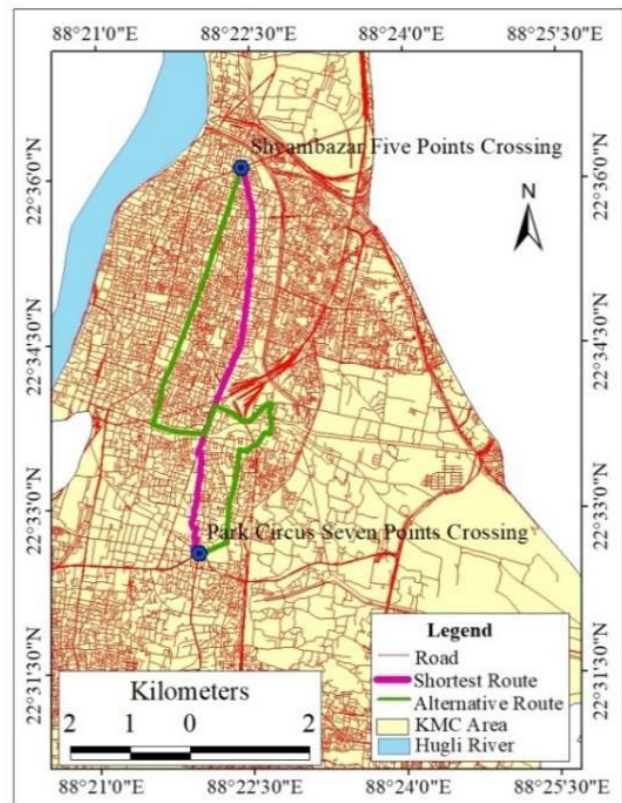


Fig. 5 Shortest and Alternative Routes between Five Points and Seven Points Crossing

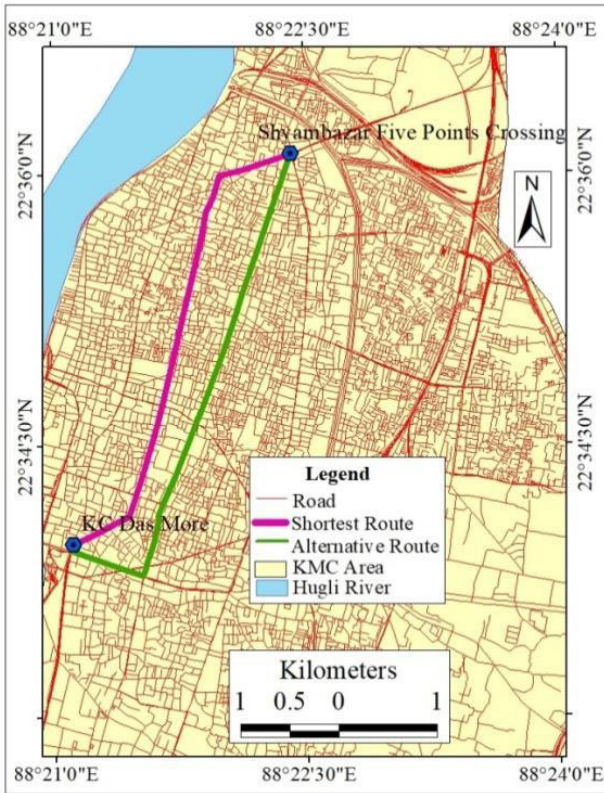


Fig. 6 Shortest and Alternative Routes between Five Points and KC Das More

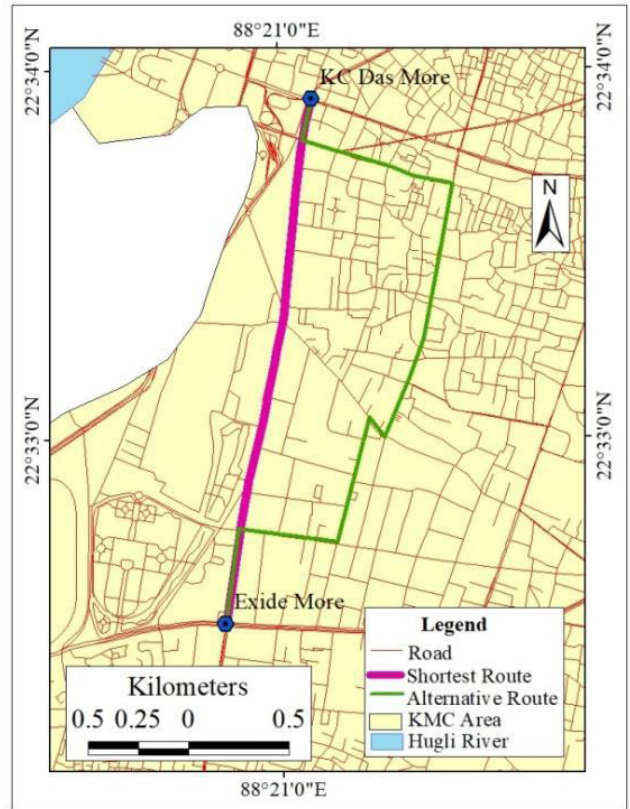


Fig. 7 Shortest and Alternative Routes between KC Das More and Exide

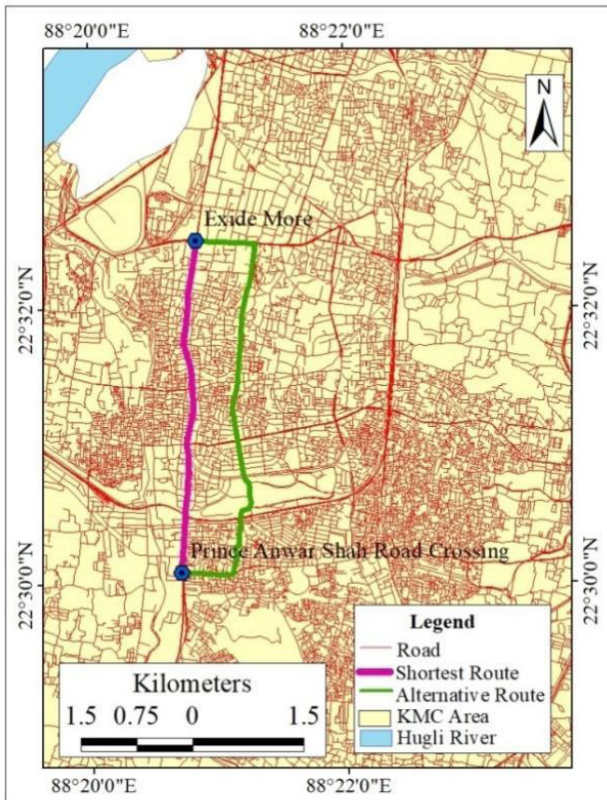


Fig. 8 Shortest and Alternative Routes between Exide More and Prince Anwar Shah Road Crossing

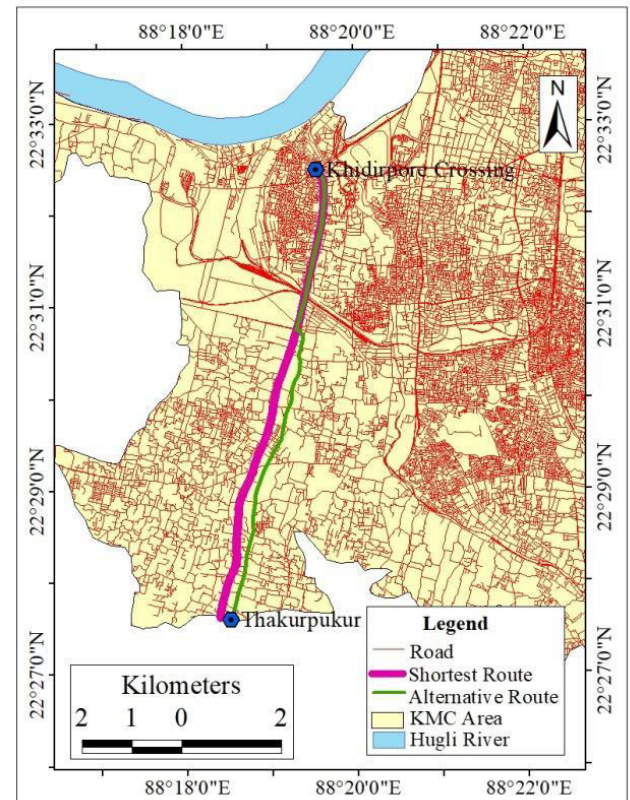


Fig. 9 Shortest and Alternative Routes between Khidirpore crossing to Thakurpukur

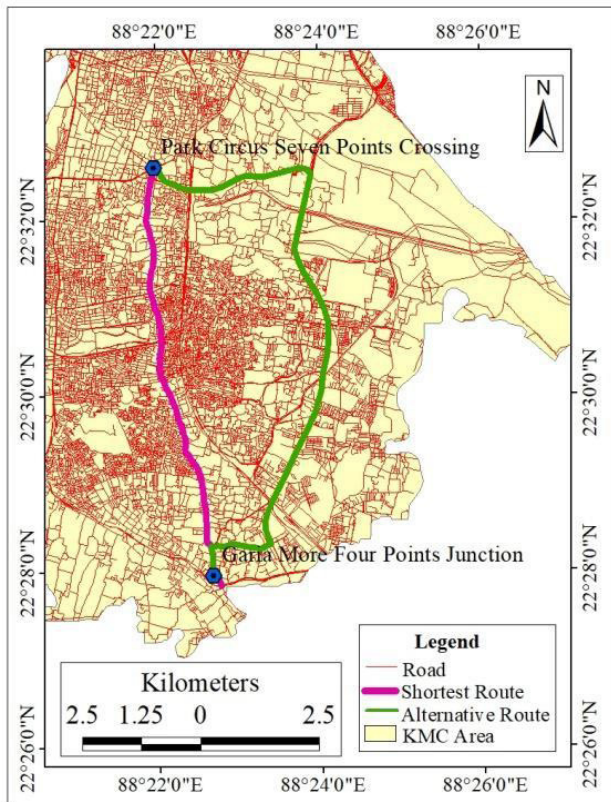


Fig. 10 Shortest and Alternative Routes between Seven Points Crossing and Garia more

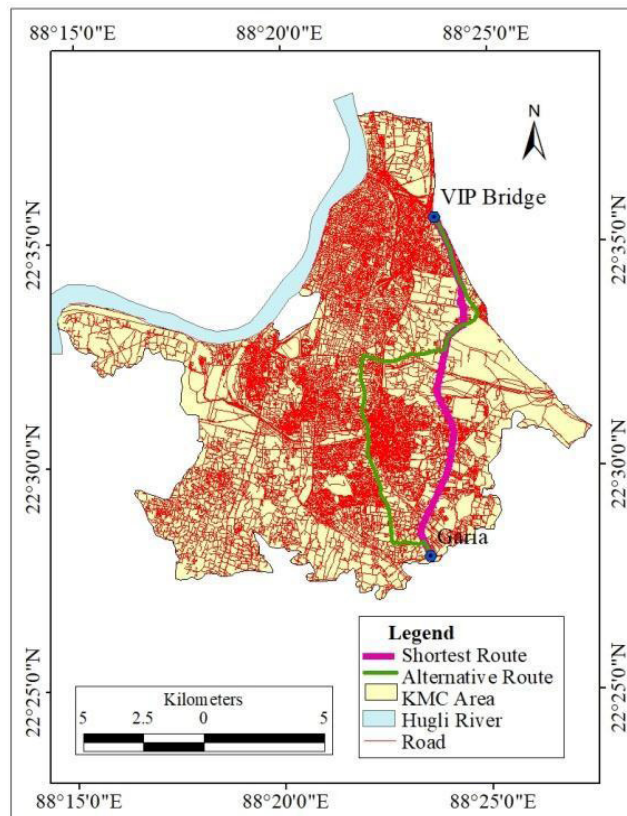


Fig. 11 Shortest and Alternative Routes between VIP Bridge and Garia

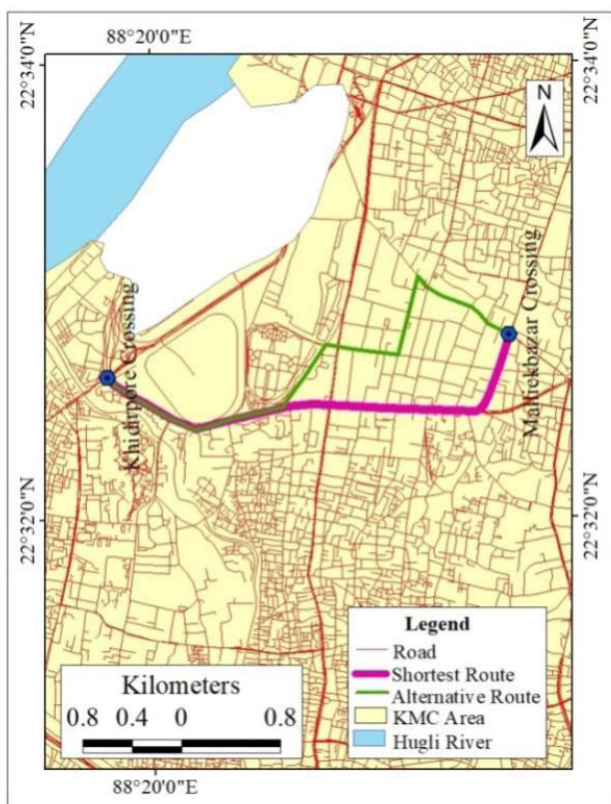


Fig. 12 Shortest and Alternative Routes between Mallick Bazar Crossing to Khidirpore Crossing

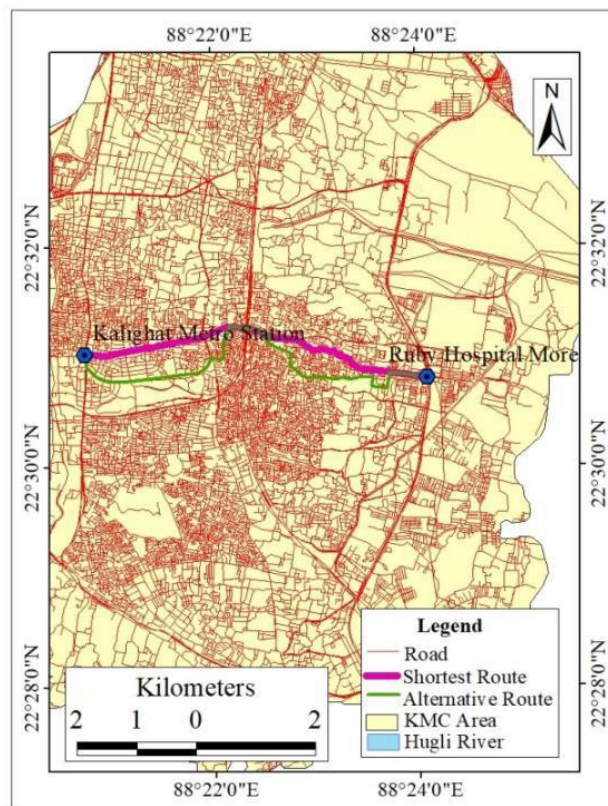


Fig. 13 Shortest and Alternative Routes between Kalighat and Ruby More

5. Conclusion

The best route ensures security in emergencies and comfort in common journeys in the context of urban traffic congestion. This study analyses that the time distance of roads is more significant as compared to the physical distance when movement in congested roads are concerned. Yet, shortest distance routes have been identified as the best route despite increased travel time during peak hours along them in 50 percent of cases as alternative routes to them are also affected by traffic congestion in peak hours. Nevertheless, it cannot be overlooked that in a city like Kolkata where congestion on roads is a daily event, in cases of emergency like accidents and urban fire following alternative routes is the best possible solution. So, the present study suggested to general road users that identification of the best route from the shortest route and alternative routes is necessary knowledge to be incorporated into a journey plan. Further, as determined from the analysis the number of road intersections has a great impact on the delay rate (including traffic signaling waiting period along with section delay) avoiding intersections as much as possible by using flyovers and subways may ensure faster movement between origin and destination. However, it should be understood that identification of the best route can save travel time comparatively, but it cannot solve the challenges of congestion permanently.

Acknowledgments

The author wishes to thank the Department of Geography and Disaster Management, Tripura University (India) for providing the necessary facilities to carry out this study.

Reference

- Ahmed, S., Ibrahim, R. F., & Hefny, H. A. (2017). GIS-based network analysis for the roads network of the Greater Cairo area. *CEUR Workshop Proceedings*, 2144(July).
- Al-Dami, H. A. N. (2015). Measuring the accessibility of road networks: Diwaniya/Iraq as case study. *Journal of Current Research and Academic Review*, 3(2), 173–182.
- Arti, C., Sharad, G., Pradeep, K., Chinmay, P., & Kumar, S. S. (2022). Urban traffic congestion: Its causes-consequences-mitigation. *Res J Chem Environ*, 26(12), 164–176.
- Arif, M., & Gupta, K. (2020). Application of graph-based model for the quantification of transport network in peri-urban interface of Burdwan City, India. *Spatial Information Research*, 28, 447–457. Doi:10.1007/ s41324-019-00305-w.
- Babu, A. M. (2017). Study of urban cities traffic problems due to delay and overcrowding. *International Journal of Latest Engineering and Management Research*, 2(11), 1–8.
- Bhatta, B. (2011). *Remote sensing and GIS*. Oxford University Press.
- Biswas, S., Singh, B., & Saha, A. (2016). Assessment of level-of-service on urban arterials: a case study in Kolkata metropolis. *Int. J. Traffic Transp. Eng.*, 6(3), 303–312.
- Bora, T., & Baruah, A. K. (2019). *Road network connectivity and spatial pattern of Dispur city*. www.jetir.org
- Chakrabartty, A., & Gupta, S. (2014). Traffic Congestion in the Metropolitan City of Kolkata. *Journal of Infrastructure Development*, 6(1), 43–59. <https://doi.org/10.1177/0974930614543046>
- Chakrabartty, A., & Gupta, S. (2015). Estimation of Congestion Cost in the City of Kolkata—A Case Study. *Current Urban Studies*, 03(02), 95–104. <https://doi.org/10.4236/cus.2015.32009>
- Chowdhury, I. R. (2015). Traffic Congestion and Environmental Quality : A Case Study of Kolkata City. *International Journal of Humanities and Social Science Invention*, 4(7), 20–28.
- Chen, M., Wu, F., Yin, M., & Xu, J. (2021). Impact of road network topology on public transportation development. *Wireless Communications and Mobile Computing*, 2021, 1–11.
- Chu, X. N., & Thi, H. D. (2017). Actual situation and solutions for reducing the traffic jams and congestion in Vietnam. *Advances in Natural and Applied Sciences*, 11(12), 26–34.
- Cole, J. P., & King, C. A. M. (1968). *Quantitative geography* John Wiley. London, 692, 200–201.
- Daniel, C. B., Mathew, S. & Saravanan, S. (2021). Spatial interdependence of fractal dimension and topological parameters of road network: a geographically weighted regression approach. *Spat. Inf. Res.* <https://doi.org/10.1007/s41324-021-00390-w>
- Daniel C. B., Saravanan S., & Mathew S. (2020). GIS Based Road Connectivity Evaluation Using Graph Theory. Mathew T., Joshi G., Velaga N., Arkatkar S. (eds) *Transportation Research. Lecture Notes in Civil Engineering*, vol 45. Springer, Singapore. https://doi.org/10.1007/978-981-32-9042-6_17
- Dalip, & Kumar, V. (2016). Optimum Route Selection for Vehicle Navigation. *International Journal of Advanced Computer Science and Applications*, 7(2), 142–148. <https://doi.org/10.14569/ijacsa.2016.070219>
- Das, D., & Ahmed, M. A. (2018). Level of service for on-street parking. *KSCCE Journal of Civil Engineering*, 22(1), 330–340. <https://doi.org/10.1007/s12205-017-1538-1>
- Dasmahapatra, D (2023). Measuring the Urban Road network pattern using connectivity analysis: A micro-level study in Egra Municipality, West Bengal. *International Journal of Science and Research Archive*, 8(2), 117–127. <https://doi.org/10.30574/ijrsra.2023.8.2.0209>
- Dey, T. (2016). *Indian Journal of Spatial Science An Assessment of Road Traffic Congestion at Park Circus Crossing, Kolkata*. i(2), 49–58.
- Dill, J. (2004). *Measuring Network Connectivity for Bicycling and Walking.” In 84th Annual Meeting of the Transportation Research Board. Paper 04-001550*. 1–21.
- Dutta, S., & Mistri, D. (2012). Problems of transportation system in Bardhaman municipal area, West Bengal. *Practicing Geographer; Journal of Foundation of Practicing Geographers*, vol 16.67-78.
- FitzGerald, B. P. (1974). *Developments in geographical method* (Vol. 82). Oxford University Press, USA.
- Ghosh, S., & Mondal, M. (2019). *Risk Analysis for Recommendation of an Effective Fire Hazard Management System: A Study in Kolkata Municipal Corporation (KMC) Area, West Bengal, India*. 2454–9150. <https://doi.org/10.35291/2454-9150.2019.0062>
- Haque, S. M, & Alam, M. J. (2020). Micro-Level Analysis of Road Connectivity and Its Spatial Variation in the Kolkata Municipal Corporation (KMC) Area. *Urbanization and Regional Sustainability in South Asia: Socio-Economic Drivers, Environmental Pressures and Policy Responses*, 157–176.
- Hartanto Susilo, B., & Imanuel, I. (2018). Traffic congestion analysis using travel time ratio and degree of saturation on road sections in Palembang, Bandung, Yogyakarta, and Surakarta. *MATEC Web Conf.*, 181. <https://doi.org/10.1051/mateconf/201818106010>
- Ivan, K., Haidu, I., Benedek, J., & Ciobanu, S. M. (2015). Identification of traffic accident risk-prone areas under low-light conditions. *Natural Hazards and Earth System Sciences*, 15(9), 2059–2068. <https://doi.org/10.5194/nhess-15-2059-2015>
- Kansky, K. J. (1963). *Structure of transportation networks: relationships between network geometry and regional characteristics*. The University of Chicago.
- Karuppanagounder, K. & Muneera, C. (2017). Performance Evaluation of Urban Links under Heterogeneous Traffic Condition. *European Transport*, (65), pp 1-10.
- Kisgyörgy, L., Vasvári, G. (2014) Analysis and Observation of Road Network Topology. *Proceedings of the 19th International Conference of Hong Kong Society for Transportation Studies*, Hong Kong. pp. 253-259. ISBN: 978-988-15814-3-3

- Kolkata Metropolitan Development Authority. 2008. Comprehensive Mobility Plan, *Kolkata Metropolitan Area*.
- Kolkata Traffic Police. 2018. Annual Review Bulletin.
- Kumar, P., & Kumar, D. (2016). Network Analysis using GIS Techniques: A Case of Chandigarh City. *International Journal of Science and Research (IJSR)*, 5(2), 409–411. <https://doi.org/10.21275/v5i2.nov161143>
- Kumar, R., Parida, Dr. P., Madhu, Dr. E., & Kumar, A. V. A. B. (2017). Does Connectivity Index Of Transport Network Have Impact On Delay For Driver? *Transportation Research Procedia*, 25, 4988–5002. <https://doi.org/https://doi.org/10.1016/j.trpro.2017.05.377>
- Kundu, P., & Basu, R. (2015). Role of transportation network in urbanization: a case study of North 24 Parganas district, West Bengal. *Int. J. Multidiscip. Res. Develop.*, 2(12), 22–28.
- Lomax, T.J. (1990) Estimating transportation corridor mobility, Transportation Research Record: *Journal of the Transportation Research Board*, No. 1280, pp. 82-91.
- Lomax, T. J. & Schrank, D. L. 2005. The 2005 urban mobility report.
- Levinson, D. (2012). Network structure and city size. *PLoS ONE*, 7(1). <https://doi.org/10.1371/journal.pone.0029721>
- Li, M., Guo, R., Li, Y., He, B., Chen, Y., & Fan, Y. (2019). Distribution Characteristics of the Transportation Network in China at the County Level. *IEEE Access*, 7, 49251–49261. <https://doi.org/10.1109/ACCESS.2019.2910299>
- Lomax, T., Turner, S., Shunk, G., Levinson, H. S., Pratt, R. H., Bay, P. N., & Douglas, G. B. (1997). *Quantifying Congestion. Volume 2: User's Guide*.
- Maparu, T. S., & Pandit, D. (2010). Selection of corridors for BRT Kolkata. *Institute of Town Planners, India Journal*, December, 21–36.
- Mukherjee, D., & Mitra, S. (2020). A comprehensive study on identification of risk factors for fatal pedestrian crashes at urban intersections in a developing country. *Asian Transport Studies*, 6, 100003. <https://doi.org/https://doi.org/10.1016/j.eastst.2020.100003>
- Nagne, A. D., & Gawali, B. W. (2013). Transportation network analysis by using Remote Sensing and GIS a review. *International Journal of Engineering Research and Applications*, 3(3), 70-76.
- Nagne, A. D., Vibhute, A. D., Gawali, B. W., & Mehrotra, S. C. (2013). Spatial analysis of transportation network for town planning of Aurangabad city by using Geographic Information System. *International Journal of Scientific & Engineering Research*, 4(7), 2588–2594.
- Obafemi, A. A., Eludoyin, O. S., & Opara, D. R. (2011). Road network assessment in Trans-Amadi, Port Harcourt in Nigeria using GIS. *International Journal for Traffic and Transport Engineering*, 1(4), 257-264.
- Patra, M. C. (2015). Urban transport dynamics a study of road transport of Kolkata. (*Unpublished Doctoral Thesis*), University of Calcutta, Kolkata, West Bengal.
- Patra, U. K., Hembram, R., Mandal, P., & Sinha, S. (2019). Analysis of the Spatial Pattern of Road Transport Network in Jungle Mahal Blocks of Purulia District, West Bengal, India. *Journal of The Gujarat Research Society*, 21(13).
- Purkait, S. K., & Halder, S. (2016). Fire Accident in Kolkata Slums: A Case Study of Basanti Colony and Tangra Slum-Causes, Consequences and Possible Ways to Mitigation. In *International Journal of Humanities & Social Science Studies (IJHSSS)* (Vol. 3, Issue I, pp. 266–278). Scholar Publications Karimganj, Assam, India.
- Robinson, H., & Bamford, C. G., 1978 *Geography of Transport*. Macdonald and Evans, ISBN 978-0-415-48324-7
- Rahman, F., & Kumar, S. (2023). Analysis of road network accessibility using graph theory and GIS technology: A study of Bhojpur district, Bihar. *IJAR*, 9(4), 104–110.
- Rai, P. K., Singh, P. K., Singh, A. K., & Mohan, K. (2013). Network Analysis Using GIS. *International Journal of Emerging Technologies in Computational and Applied Sciences (IJETCAS)*, 5(32019), 289–292.
- Rao, A. M. & Rao, K. R. (2012). Measuring urban traffic congestion-a review. *International Journal for Traffic & Transport Engineering*, 2(4), pp 286-305.
- Ray, T. K. (2018). Road Traffic accidents in urban area under the jurisdiction of Kolkata police a Geographical analysis (unpublished Doctoral thesis), University of Calcutta, Kolkata, West Bengal.
- Ray, T.K., & Bhaduri, S. (2018). *Spatiotemporal Variation of Road Traffic Accident in Kolkata: An Appraisal*. *International Journal of Recent Scientific Research*, 9(3), 24970-24974.
- Rodrigue, & Jean-Paul. (2006). *The Geography of Transport Systems*. <http://people.hofstra.edu/geotrans>.
- Roess, R. P., Prassas, E. S., & McShane, W. R. (2011). *Traffic engineering*. Pearson.
- Sadavare, A. B., & Kulkarni, R. V. (2012). A Review of Application of Graph Theory for Network. *International Journal of Computer Science and Information Technologies*, 3(6), 5296–5300.
- Sahu, A., Dutta, A., & Saha, P. (2021). Travel Time Comparison Using Google Map and OSM Tracker. *International Journal of Advanced Research in Science, Communication and Technology*, 3(2), 182–200. <https://doi.org/10.48175/ijarsct-890>
- Sarkar, D. (2013). Structural Analysis of Existing Road Networks of Cooch Behar District, West Bengal, India: A Transport Geographical Appraisal. *Ethiopian Journal of Environmental Studies and Management*, 6(1). <https://doi.org/10.4314/ejesm.v6i1.9>
- Sarkar, P., & Kanti Ray, T. (2021). An analysis of road network development in Darjeeling town, West Bengal. In *Transactions* (Vol. 43, Issue 2).
- Saxena, H. M. (2005). *Transport geography*. Rawat Publications.
- Shivaprasad, K. S., Shruthi, S., Chandana, R., & K, N. A. Y. (2018). Advanced Traffic Control System for Emergency Vehicle. *NCESC - 2018 Conference Proceedings*, 6(13), 1–3.
- Sreelekha, M. G., Krishnamurthy, K., & Anjaneyulu, M. V. L. R. (2016). Interaction between Road Network Connectivity and Spatial Pattern. *Procedia Technology*, 24, 131–139. <https://doi.org/10.1016/j.protcy.2016.05.019>
- Taaffe, E., Gauthier, H., & O'Kelly, M. (1973). *Geography of Transportation*. Prentice Hall. *Englewood Cliffs NJ*.
- Tamin, O. Z. (1996). *Simplified public transport route planning method: a study case in Bandung (Indonesia)*. 23.
- Toulni, H., Miyara, M., Filali, Y., & Tékouabou, S. C. K. (2023). Preventing urban traffic congestion using VANET technology in urban area. *E3S Web of Conferences*, 418, 02005.